



irconium Doped Ceria Electroceramic with a High Electrostriction Coefficient



Material
Science

Reference Number: 2180 | Principal Investigator: Prof. Lubomirsky Igor
Patent Status: WO 2025/146685, US-2024-030082


Electrostrictive actuators are devices that convert electrical signals into tiny, precise movements, widely used in medical devices, robotics, and microelectronics. Current gold-standard materials, such as PMN-PT, provide strong performance but have major drawbacks: they contain toxic lead, require high power, are mechanically weak, and are not compatible with silicon chip technology. This technology presents a new approach using ceria-based electrostrictive materials with specially designed non-blocking contact layers, combining strong actuation with high mechanical strength, low power consumption, and full compatibility with microfabrication processes

APPLICATIONS

- Medical micro-devices: e.g., miniature insulin pumps and drug-delivery systems.
- MEMS and NEMS actuation: micro-positioning, optical switching, and micromechanical control.
- Industrial actuators: high-precision robotics, aerospace, and automotive systems.
- Replacement for lead-based electrostrictors: eco-friendly alternative to PMN-PT/PZT in sensors & actuators

DEVELOPMENT STAGE

- Prototype multilayer stacks fabricated (slurry-casting and co-pressing/co-firing) and validated by SEM, impedance, and strain tests
- Demonstrated stable strain responses of 200–1000 ppm over 96 hrs continuous operation
- Pump design studies confirm the feasibility of stack-based electrostrictive micro-pumps, with superior performance over PZT

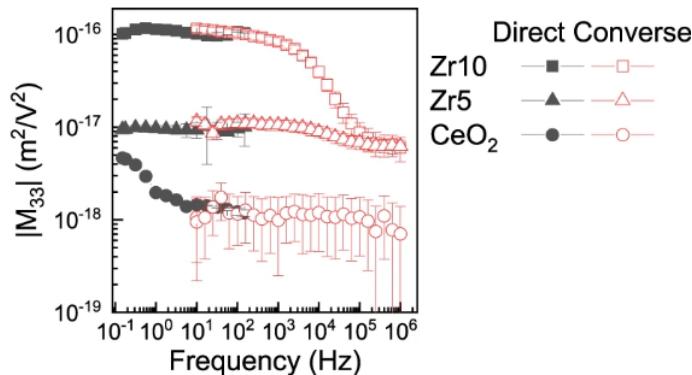

Log-log plot of the absolute value of the converse ($V_{AC}=10V$) and direct longitudinal electrostriction strain coefficients for undoped ceria and for 5-10 mol% Zr-doped ceria as a function of frequency.

DIFFERENTIATION



Non-blocking contacts: Maintain efficient strain response without interfacial losses



Superior properties:
High stiffness (>190 GPa) and low dielectric constant vs. PMN-PT



Safe & compatible:
Lead-free, inert, and suitable for silicon microfabrication



Proven durability:
Stable actuation (>200 ppm strain) for 100+ hours

REFERENCES

- Varenik et al, Nat Commun 2023

